




LITHIUM

RT33-44SP / RT33DP

3,300 - 4,400 lbs. Capacity
Stand-Up Pantograph Reach Truck



Why choose between price and quality **WHEN YOU CAN HAVE BOTH!**



HIGHLIGHTS

- ▶ American Curtis Intelligent Computer Control system
- ▶ Dual independent AC drive motors with separate drive controllers
- ▶ 36V fully electric AC system
- ▶ Lithium battery: 36V/560Ah
- ▶ Charger: 36V/200A
- ▶ Fast charging 2.5 hours
- ▶ Large capacity battery provides multiple shift operation.
- ▶ On-board Curtis self-diagnostics
- ▶ Large LED display: lifting weight, lifting height, speed, power, steering, fault code, alarm and more.
- ▶ Wireless mast mounted fork view camera with HDMI color monitor
- ▶ Integrated multi-task control
- ▶ Proportional lift for accurate control of the lift height
- ▶ Fork tilt leveling
- ▶ Side shifter
- ▶ Travel speed: 5.9mph (unloaded), 5.6mph (loaded)
- ▶ Speed reduction in turns

RT33-44SP / RT33DP **3,300 - 4,400 lbs. Capacity** Stand-Up Pantograph Reach Truck

The RT33-44SP / RT33DP Lithium Single & Double Scissor Stand-Up Pantograph Reach Trucks operate within a narrow aisle, have lift heights ranging from 177" to 452", and a fork reaching distance ranging from 22.4" to 41.7". They offer high-speed lifting and lowering and are equipped with a lithium battery capable of multiple shift operation. High-maneuverability and high-reach capabilities make these reach trucks the ideal choice for your most demanding applications where efficient, narrow aisle, high-lift height material handling is required.

COMPACT AND HIGHLY PRODUCTIVE REACH TRUCK



SUPERIOR DESIGN AND PERFORMANCE



Automatic decelerating while turning, improves safety, stability and operator comfort, while preventing product damage.

360°

Zero Turning
Radius



Dual independent AC drive motors with separate drive controllers provide superior maneuverability while turning.


AC drive and gearbox technology ensure accurate control and travel speed.



SUPERIOR DESIGN AND PERFORMANCE

- The scissor structure is designed for smooth reaching while minimizing vibration and rocking.
- The conversion between movements is seamlessly achieved through the equilibrium of shear force, delivering substantial torque. When raised to a height of 452", it can effortlessly lift loads of up to 1,200 lbs.
- Scissors fold away, minimizing the truck's footprint and maximizing space utilization.
- The end-of-scissor retraction is cushioned for reduced impact and improved stability.

Lifting height up to 452 inches.

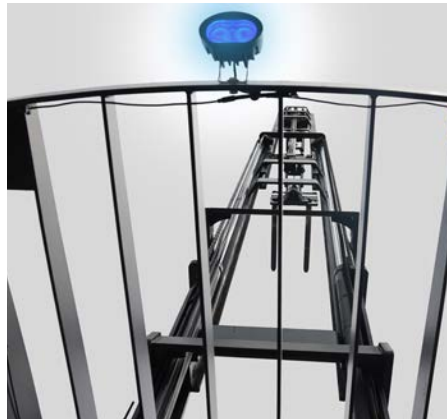

Cab design, open view mast and overhead guard gives operator a clean line of site to the load and their surroundings for increased efficiency and improved safety.



RT33/44SP (Single Reach)
Fork reaching distance- 22.4"

RT33DP (Double Reach)
Fork reaching distance 41.7"



Wireless mast mounted fork view camera with HDMI color monitor provides an unrestricted view of the pallet and racking for increased productivity and increased safety.



INTELLIGENT. PRODUCTIVE. CONVENIENT.



One-button tilt control system ensures safety by limiting the tilt of cargo when forks are lifted high.



Multi-functional handle controls key vehicle functions – forward/backward travel speed, side shifting and proportional lifting and lowering.



Ergonomic compact steering wheel with knob provides comfortable and effortless operation.



The floor suspension system adapts to the weight of the operator and provides impact and vibration protection.



Adjustable backrest and hip pad contour the body to ensure operator comfort throughout the entire work shift.




Armrest can be adjusted to maximize the comfort of operators of different heights.



INTELLIGENT. PRODUCTIVE. CONVENIENT.



Large LED screen conveniently displays lifting weight, lifting height, speed, power, steering, fault code, alarm and more.

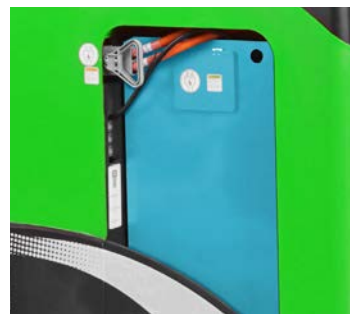

Large capacity battery for multiple shift operation. Side extraction reduces maintenance time.



A low step height and a wide entry is ideal for operators who are frequently getting on and off the forklift.



USB connector for charging and powering of additional devices during operations.


CAN-bus



CURTIS

Easily check condition and troubleshoot with Curtis controller and CAN-bus technology.

RELIABILITY AND SAFETY

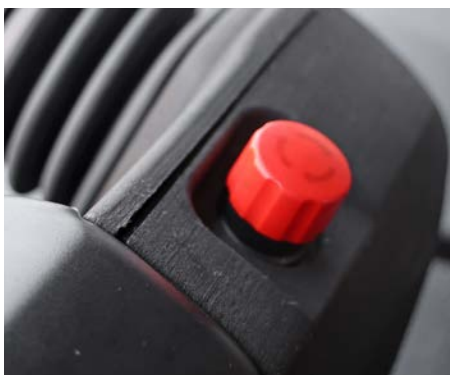

Emergency power button cuts off the power in emergency situations to protect the operator and the cargo.



Equipped with LED headlights, safety blue light and a buzzer for safe driving.






Dual-brake/presence pedal design protects the operator and the forklift. If both pedals are not depressed, the forklift will be not travel in any direction.

LITHIUM SMART CLOUD PLATFORM

Wireless 4G advanced battery monitoring system for remote battery monitoring and system data.

Smart Cloud platform constantly monitors the battery's operational status throughout its usage to ensure the safety of personnel and equipment.

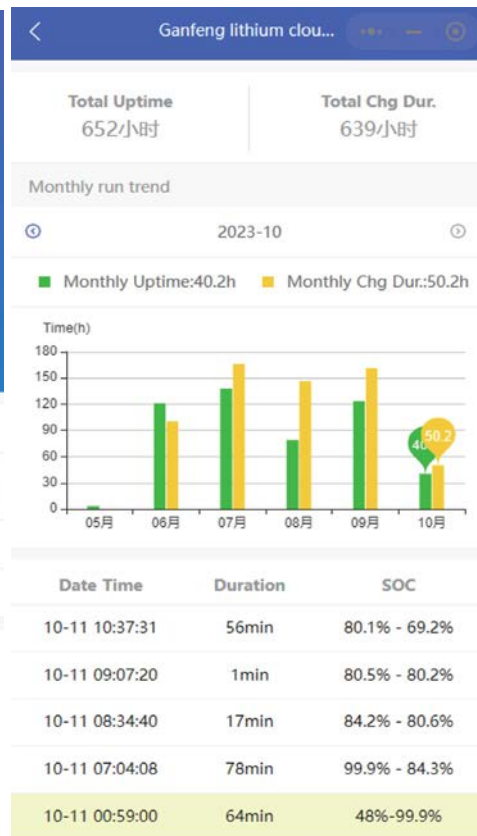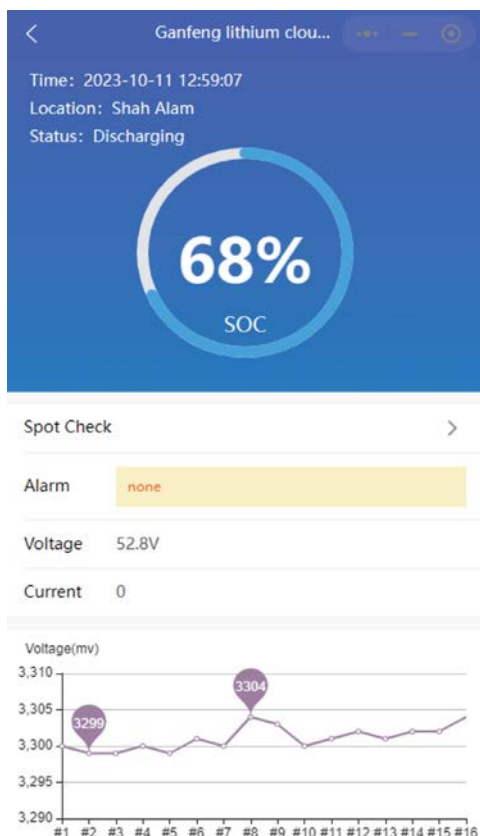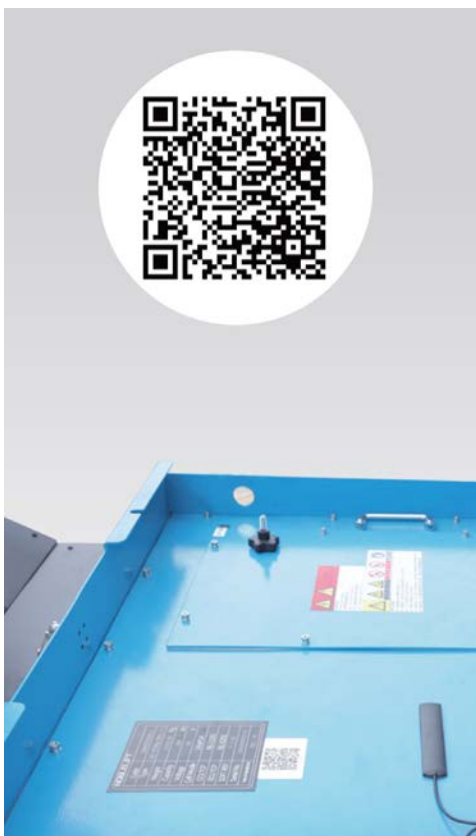

LONG LASTING AND SAFE LITHIUM-IRON POWER

NOBLELIFT uses Lithium-Iron Phosphate batteries, the longest lasting and safest lithium battery available. Our lithium-iron batteries are equipped with a Battery Management System (BMS), thermal management system, and an automotive-grade DC high-voltage control system. BMS manages charging and discharging data to ensure safety throughout its life cycle.



RT33-44SP / RT33DP Stand-Up Reach Trucks have a 5 year or 10,000 hours warranty on the lithium-iron battery cells.

ADVANTAGES OF LITHIUM-IRON POWER

LITHIUM BATTERY ADVANTAGES

Fast-charging maintenance-free
Lithium battery is fully charged in 2.5 hours. Battery can be opportunity charged during user breaks and during shift changes which allows the truck to run continuously through multi-shift operations. No battery changes are necessary.



36V/560Ah Lithium-iron battery has connection terminals with screws and is protected inside the steel case.





36V/200A Charger included standard.

Lead-Acid Battery		Lithium Battery
Lower fleet availability - Work is interrupted because battery needs to be fully charged before next use	Productivity - Memory Effect 	100% Fleet availability - Opportunity charging allows battery to be charged in between use
Periodic battery replacement	Service Life 	Batteries last 3 times longer and do not need to be replaced
Outsourced or in-house maintenance personnel required	Ongoing Maintenance 	No maintenance cost
8-10 Hours - 2 or more batteries per lift truck	Charge Duration 	2.5 Hours - 1 Battery per lift truck
Build an expensive battery room with ventilation	Battery Room 	No battery room needed
Releases hydrogen while charging - Can result in explosion - Acid burns can happen during maintenance	Dangerous Substances 	No dangerous substances
Power loss	Power Savings 	No power loss - Reduces energy consumption by 35%

Identification					
1.2	Model		RT33SP	RT44SP	RT33DP
1.3	Drive (electric, diesel, petrol, fuel gas, manual)		Lithium		
1.4	Type of operation (hand, pedestrian, standing, seated, order picker)		Stand-up reach truck		
1.5	Load capacity	Q (lb)	3,300	4,400	3,300
1.6	Load center	c (in)	24		
1.8	Load distance	x (in)	12/10.4	12/10.4	8.4/33.3
1.9	Wheel base	y (in)	see table on facing page		
Weights					
2.1	Service weight (with battery)	lb	see table on facing page		
Wheels, Chassis					
3.2	Tire size, power unit side (drive)	in	Ø 13.5 x 5.5		
3.3	Tire size, load side	in	Ø 5 x 2.9		
3.4	Castor wheel size	in	Ø 8 x 4		
3.5	Wheels, number front / rear (x = driven wheels)		1 x 4 / 1		
3.6	Tread, power unit side	b ₁₀ (in)	31.5		
Basic Dimensions					
4.1	Tilt, forward / backward	deg	3 / 4		
4.2	Lowered mast height	h ₁ (in)	see table on facing page		
4.3	Free lift	h ₂ (in)	see table on facing page		
4.4	Lift height	h ₃ (in)	see table on facing page		
4.5	Extended mast height	h ₄ (in)	see table on facing page		
4.7	Overhead guard height, standard	h ₆ (in)	see table on facing page		
4.10	Outrigger height, standard wheel / Ø4 / Ø5 / Ø6	h ₈ (in)	4.9		
4.20	Headlength	l ₂ (in)	see table on facing page		
4.21	Overall width, power unit side	b ₁ (in)	42.5		
4.22	Fork dimensions, standard	s/e/l (in)	1.75 / 5 / 42	1.5 / 4 / 42	1.5 / 4 / 42
4.23	Fork carriage, DIN 15173 class / form A, B		2A		
4.24	Fork carriage width, including load backrest	b ₃ (in)	32.3		
4.25	Width across forks, with sideshift / without sideshift	b ₅ (in)	7.9 - 29.9		
4.26	Inside straddle, in 1 inch increments	b ₄ (in)	41.3 / 50		
4.28	Reach, with sideshift / without sideshift	l ₄ (in)	22.4	22.4	41.7
4.32	Ground clearance, center wheelbase	m ₂ (in)	2		
4.33	Right Angle Stack with 40x48 pallet	Ast (in)	see table on facing page		
4.34	Right Angle Stack with 32x48 pallet	Ast (in)	see table on facing page		
4.35	Turning radius	Wa (in)	see table on facing page		
4.39	Width outrigger	b ₂ (in)	see table on facing page		
Performance Data					
5.1	Travel speed, laden / unladen	mph	5.6 / 5.9		
5.2	Lift speed, laden / unladen	ft/s	1.15 / 1.64		
5.3	Lowering speed, laden / unladen	ft/s	1.64 / 1.64		
5.4	Reach speed, laden / unladen	ft/s	0.40 / 0.49		
5.8	Max. Gradeability, with load	%	5		
5.10	Brakes, service		Electric		
	Brakes, parking		Electric		
E-Motor					
6.1	Drive motor rating, 60 min. rating	HP	5.5		
6.2	Lift motor rating, 15% on time	HP	11		
6.3	Max. battery size, DIN 43531/35/36 A, B, C, no	LxWxH (in)	see table on facing page		
6.4	Battery voltage, nominal capacity K5	V/Ah	36V/560Ah		
6.5	Battery weight	lb	see table on facing page		
Others					
8.1	Type of drive control		AC		

NOBLELIFT reserves the right to make technical changes and improvements to our products to maintain or enhance the quality, delivery, and efficiency.

RT33SP Single Reach				SP177	SP193	SP256	SP295	SP334	SP374	SP413
1.9	Wheel base	y	in	61	61	61	61	61	61	63
2.1	Service weight (with battery)		lb	7,926	8,014	8,367	8,587	8,808	9,259	9,824
4.2	Mast	h1	in	89	95.1	115.7	128.9	142	155.1	168.3
4.3	Free lift	h2	in	52.8	58.9	79.5	92.7	105.7	118.9	132
4.4	Lift height	h3	in	177.2	193.7	255.9	295.3	334.6	374	413.4
4.5	Extended mast height	h4	in	220	236.5	298.7	338.1	377.4	416.8	456.2
4.7	Overhead guard height, standard	h6	in	89	95.1	95.1	95.1	95.1	95.1	95.1
4.20	Headlength	l2	in	59.1	59.1	59.1	59.1	59.1	59.1	61
4.33	Right Angle Stack with 40x48 pallet	Ast	in	108	108	108	108	108	108	110
4.34	Right Angle Stack with 32x48 pallet	Ast	in	110.4	110.4	110.4	110.4	110.4	110.4	112.4
4.35	Turning Radius	Wa	in	71.9	71.9	71.9	71.9	71.9	71.9	73.8
4.39	Width outrigger		in	51	51	51	51	51	51	51
6.3	Max. battery size	LxWxH	in	37.4"14.2"24.2						37.4"18"24.2
6.5	Battery weight		lb	418						

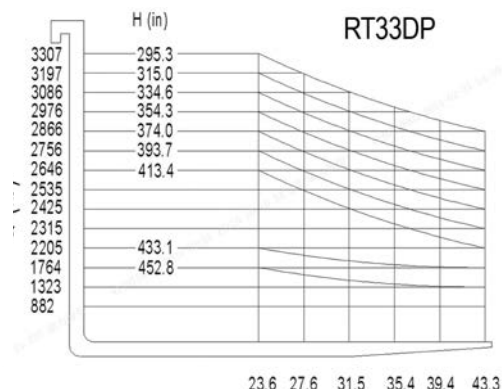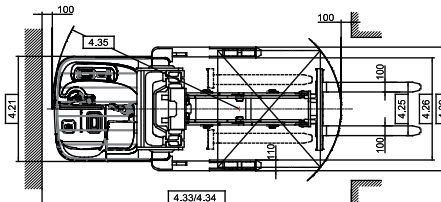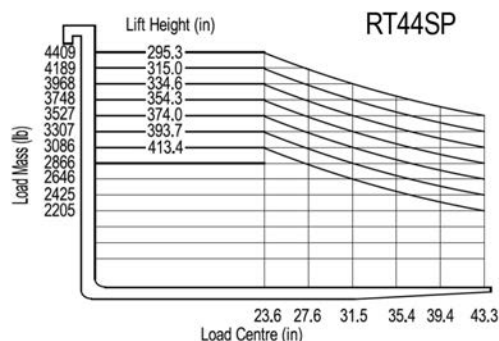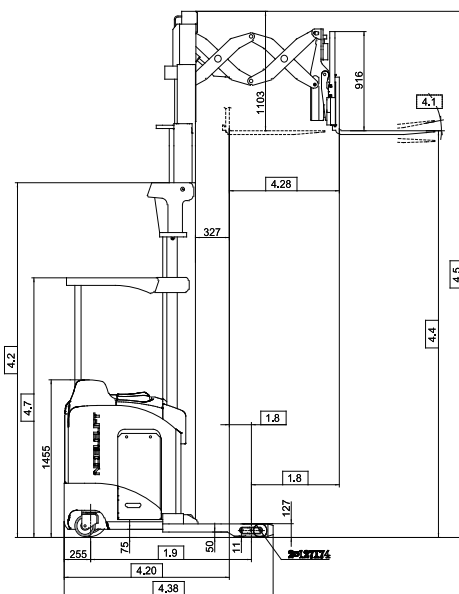

A GLOBAL LEADER

NOBLELIFT is a global leader in Lithium Technology. We manufacture more than 200 categories and around 30 series of each product. Our products are designed to meet different application demands and are well accepted by our customers in more than 100 countries and regions in Europe, America, Asia, Africa and more.

Products include: sit-down forklifts, rough terrain forklifts, narrow aisle forklifts, walkie-stackers, order pickers, electric pallet trucks, scissor lifts, tuggers, tow tractors, scrubbers, lift tables, manual pallet jacks and more.



FORKLIFTS



NARROW AISLE



STACKERS



POWERED PALLET TRUCKS



SCISSOR LIFTS



TUGGERS



SCRUBBERS

NOBLELIFT
NORTH AMERICA

2475 S. Wolf Road
D 018
T: MaterialHandling.com
1415 Davis Rd Elgin, IL 60123
Phone (855) 719-1415
sales@materialhandling.com



Website



Video

AUTHORIZED DEALER

